



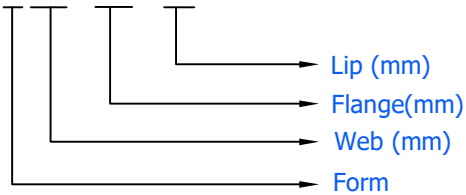
| | W | F1 | F2 | lp1 | lp2 | P1 | P2 | m | d | i | Kalınlık (t) |
|----------|-----|-----|-----|-----|-----|----|----|-----|----|----|--------------|
| Maksimum | 400 | 100 | 100 | 40 | 40 | 30 | 30 | 150 | 25 | 15 | 4.00 |
| Minimum | 170 | 50 | 50 | 30 | 30 | 18 | 18 | 50 | | | 1.00 |

| Firesiz Rulo Genişlikleri (mm) | Renk - Kaplama | Sac Levha Kalitesi |
|----------------------------------|-------------------|--------------------|
| 500 330 200 | Siyah Galvaniz | S235 JR S420 JR |
| 400 300 150 | | S275 JR |
| 375 250 100 | | S350 JR |

| Kanal-Slot  | Delik  | Özel Geometrik Kesim |
|--|---|---|
| Φ5x15 Φ8x30 Φ10x50 Φ12x50 Φ14x50 Φ16x50 Φ18x70 Φ18x80 | Φ5 Φ8 Φ10 Φ12 Φ14 Φ16 Φ18 Φ20 | Siparişe göre dizayn edebileceğimiz kalıp ünitesi |

Profil Ürün Kodu

CS 300 x 100 x 25



| Permissible deviations for basic size range / Anma ölçüsü Alanları İçin Sınır Sapmaları | | | | | | | | |
|---|------------------------------|--|-----------------|------------|---------------|----------------|-----------------|---------|
| TSEN 10162 | Designation (Sembol) | Description (Açıklama) Length (Uzunluk) | | ± 1 | ± 2 | ± 3 | ± 4 | ± 6 |
| | L | | | < 2000 | > 2000 < 6000 | > 6000 < 10000 | > 10000 < 15000 | > 15000 |
| W & F | Web & Flange (Taban & Flans) | | t < 1.50 | ± 0.50 | ± 0.75 | ± 1.25 | | |
| | | | 1.50 < t < 3.00 | ± 0.75 | ± 1.00 | ± 1.50 | | |
| | | | | 40 < < 100 | 100 < < 200 | 200 < < 400 | | |
| | | | | 40 < < 100 | 100 < < 200 | 200 < < 400 | | |